
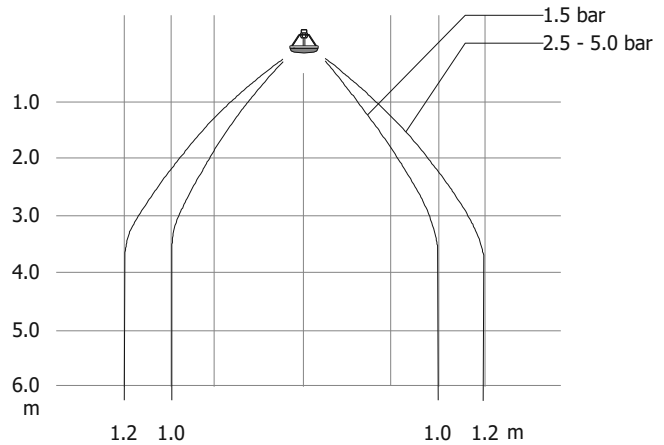


Malli
SME

Keskivaahdosuutin Medium expansion foam nozzle

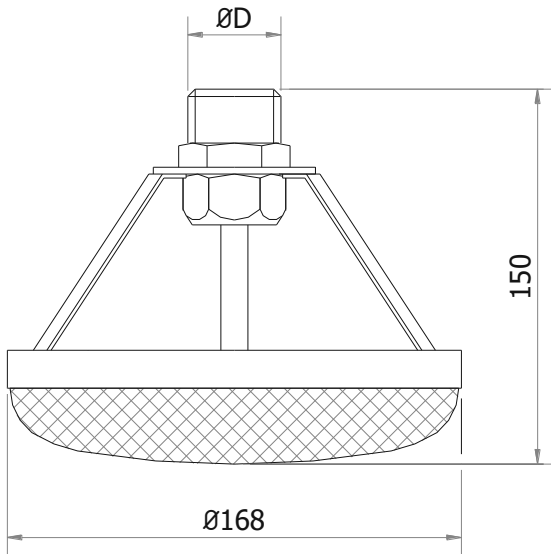

Suorituskyky – Performance

Malli Model	ØD BSP M	K-arvo k factor	Paino Weight gr
SME – K27	¾"	27	700
SME – K35	1"	35	750
SME – K45	1"	45	750

Malli Model	Virtaus / Flow rate (l/min)				Vaahtoluku / Expansion ratio *			
	Paine / Pressure (bar)				Paine / Pressure (bar)			
	1	2	3	4	1	2	3	4
SME – K27	27	38	47	54	40	52	58	56
SME – K35	35	50	61	70	40	51	57	58
SME – K45	45	64	78	90	40	54	61	61

* - Riippuen vaahtonesteen laadusta / Depending on foam concentrate type

Spesifikaatio – Specifications

Materiaali : AISI 304	Body: stainless steel AISI 304
Suihkukärki: Messinki	Nozzle: brass

Optiot – Optional

Materiaali: AISI 316	Body: stainless steel AISI 316
----------------------	--------------------------------

Hyväksyntä - Certifications

EN 13565